

# MICRO SWITCH


A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY  
 FREEPORT, ILLINOIS

FED. MFG. CODE 91929

## SWITCH — BASIC

CATALOG LISTING

### YZ-RSX351

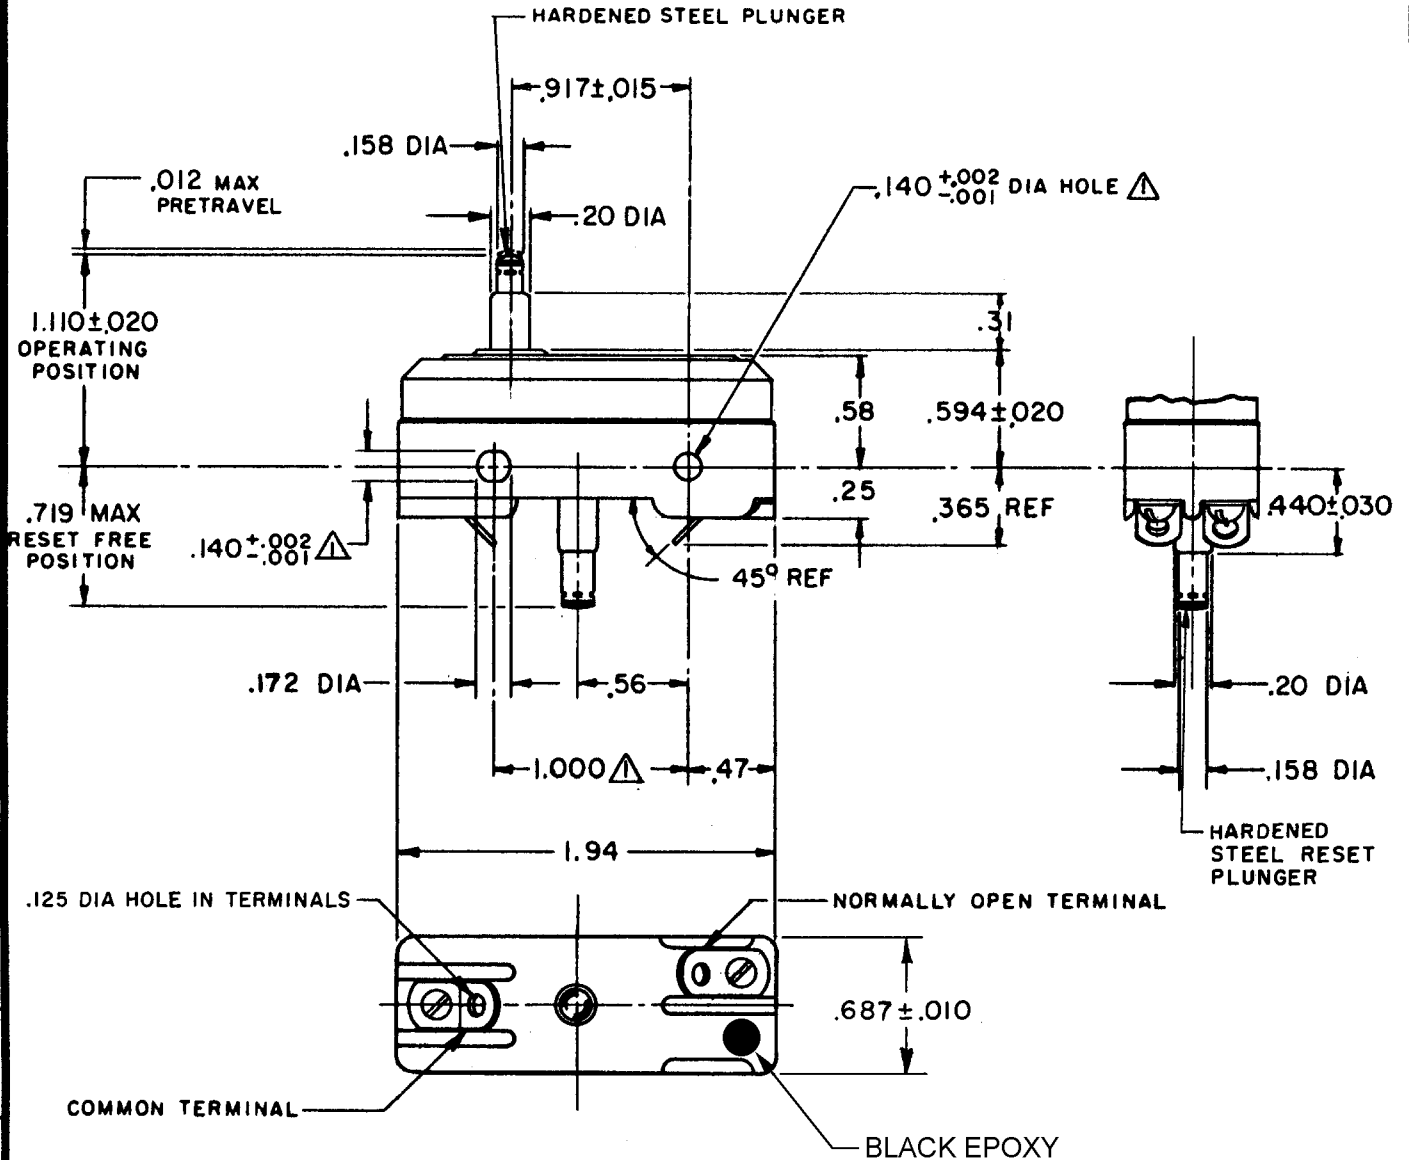

**NOTE**  
 ▲ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

#### CHARACTERISTICS

OPERATING FORCE ——— 1 — 2 OZ  
 OVERTRAVEL ——— .025 MIN

#### RESET CHARACTERISTICS

OPERATING FORCE — 1 — 2 1/2 OZ

#### ELECTRICAL DATA

CONTACT ARRANGEMENT  
 SINGLE POLE NORMALLY OPEN  
 MAINTAINED CONTACT

UNDERWRITERS' LAB. INC. LISTED RATING  
 -L9- 10 A - 125, 250, OR 480 VAC  
 1/2 A - 125 VDC; 1/4 A - 250 VDC

-L288-



#### SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED  
 DIMENSIONS ARE IN INCHES  
**TOLERANCES ARE:**  
 ONE PLACE (.0) ± .030  
 TWO PLACE (.00) ± .015  
 THREE PLACE (.000) ± .005  
 ANGLES ±

#### WEIGHT

**YZ-RSX351**  
 PAGE 1 OF 1

**M**  
 DRAWING NUMBER

7  
 ISSUE

REPLACES

RELEASE NO.

CHECK

REVISIONS

A	CO18748	JPH	28 JAN 64
B	CO24144	MBS	15 MAY 68
C	CO44156	SJS	20 APR 78
D	CO-77592	DAW	15 AUG 94
E	CO93346	DLT	17 AUG 98
F	0001191	JLH	20 AUG 03

CHECK

20 JAN 64

DAW

JPH

28 JAN 64

DRAWN

RASTER